


## SPECIFICATIONS

Size	Metric	British
Max. Working Height <b>A</b>	10.00m	32ft 10in
Max. Platform Height <b>B</b>	8.00m	26ft 3in
Overall Length <b>C</b>	2.48m	8ft 2in
Overall Width <b>D</b>	0.83m	2ft 9in
Overall Height(Rails Up) <b>E</b>	2.36m	7ft 9in
Overall Height(Rails Down) <b>F</b>	2.00m	6ft 7in
Platform Size(Length×Width)	2.27m×0.81m	7ft 5in×2ft 8in
Platform Extension Size <b>G</b>	0.90m	2ft 11in
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/1in
Wheelbase <b>H</b>	1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.10m	0in/6ft 11in
Tyres	φ381×127mm	φ381×127mm

Performance		
S.W.L	230kg	507lb
S.W.L On Extension	113kg	249lb
Max. Occupants	2	2
Gradeability	25%	25%
Travel Speed(Stowed)	3.5km/h	2.17mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	30/34sec	30/34sec

Weight		
Overall Weight(Lead-acid Battery)	2190kg	4828lb
Overall Weight(Lithium Battery)	2130kg	4695lb

Power		
Hydraulic Tank	20L	5.3gal
Battery	24V/185Ah	24V/185Ah
Charger	24V/30A	24V/30A
Lifting Motor	24VAC/3.5kW	24VAC/3.5kW

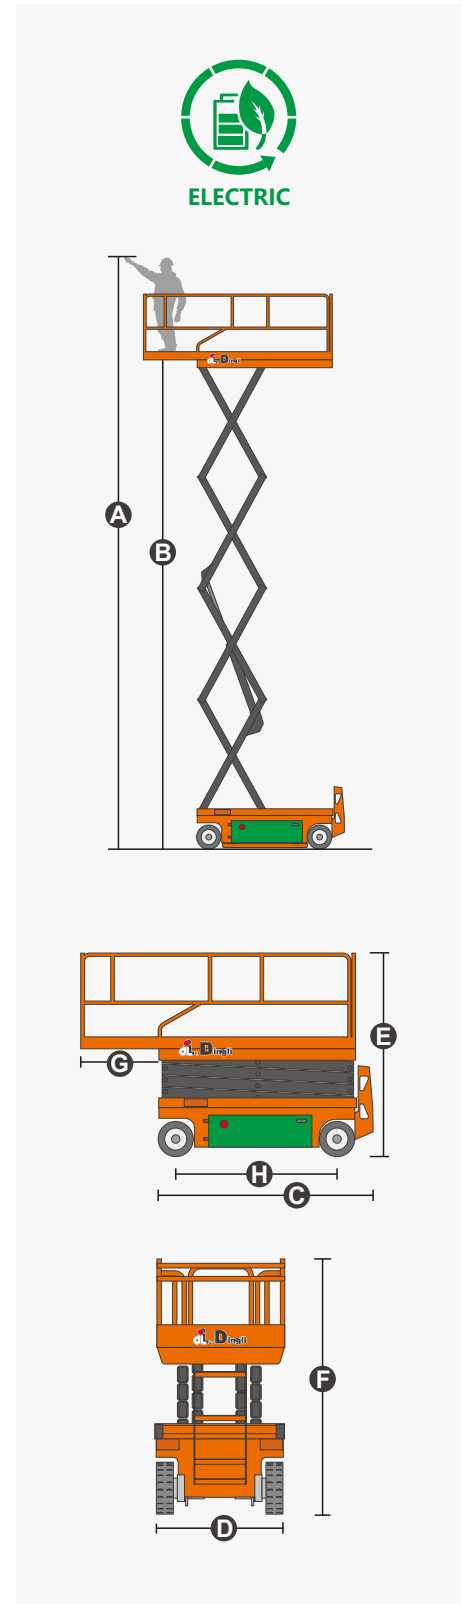

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tyres
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System
- Emergency Stop Button



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: [export@cndingli.com](mailto:export@cndingli.com)

<https://en.cndingli.com>